

PERFORMANCE PRODUCTS

Standard Service

- National coverage
- 0800 free-phone
- National pricing
- Centralised billing
- Tyre account manager

Management Reporting

- Cost per kilometre analysis
- Product performance analysis
- Purchase analysis by fleet or vehicle
- Retread-ability by brand
- Tyre volume control
- Call-out reports
- Scrap analysis report
- Tread depth analysis report
- Inflation pressure analysis report

Technical Support

- Fleet surveys
- Scrap tyre analysis
- Route studies
- Pressure recommendations
- Tyre testing
- Staff training

24 HR National Call-out Service

- New Zealand wide mobile coverage
- After hours 0800 number
- Centralized invoicing
- Guaranteed national pricing

Stand Alone Modules

- Surveys / inspections
- Scrap analysis
- Call-outs
- Tyre tracking
- Wheel torquing
- Customer service servicing

Retread Management

- Case management
- Casing optimization
- Pattern management

AVAILABLE FROM


CARTER'S
tyre service
(09) 273 6388



CARTER'S
tyre service



RETREAD PATTERN DIGEST

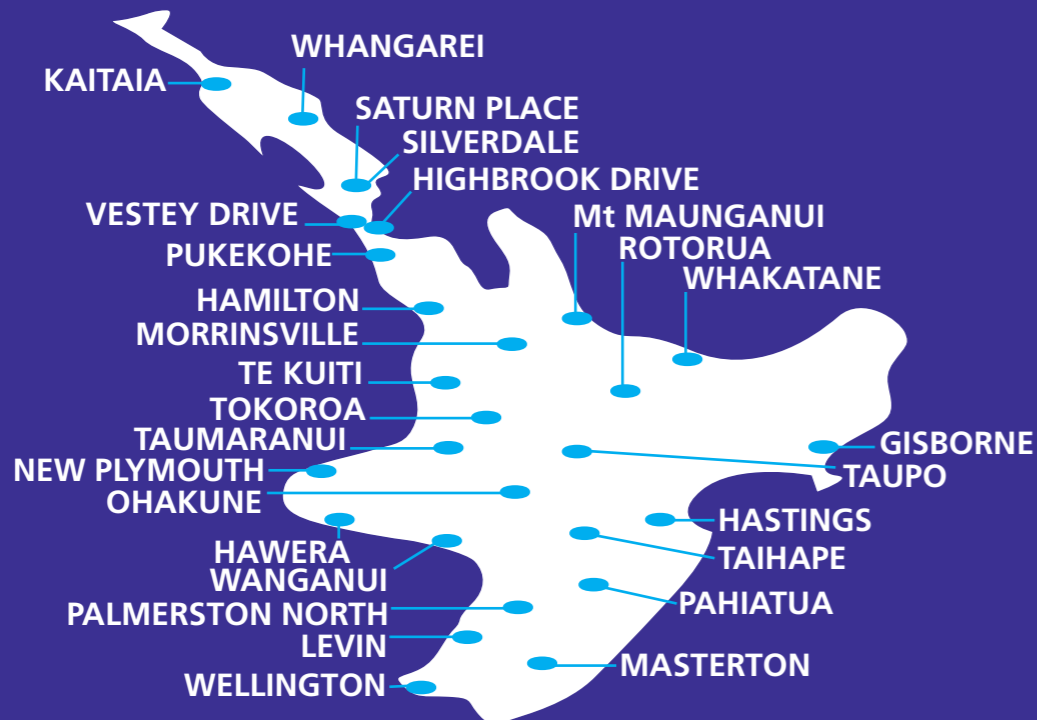

KH27

Designed as an all position fitment delivering high mileage for light commercial vehicles whether on in-city or inter-city operation.

Base width (mm)	Tread depth (mm)
150	14.0
160	14.0
180	14.5

HW ✓ DR ✓ TLR SPECIALITY
90% 10%

KH28

A deep 4 rib pattern suitable for vehicles with stop/start type applications such as bus and waste haul.

Base width (mm)	Tread depth (mm)
203	19.0

HW ✓ DR ✓ TLR ✓ SPECIALITY BUS/COACH
80% 20%

KH86

A shallow (12mm) light tread specially designed for trailer application on low profile tyres.

Base width (mm)	Tread depth (mm)
203	12.0
220	12.0
230	12.0

HW DR TLR ✓ SPECIALITY ✓
90% 10%

KM411

This directional tread and enhanced self cleaning ability delivers good mileage on both on and off road. *(Sealed and unsealed roads).

Base width (mm)	Tread depth (mm)
220	21.0
230	21.0
250	21.0

HW DR ✓ TLR SPECIALITY
60% 40%

KM16

An aggressive drive pattern for light commercial on sealed or unsealed roads. Ideal rural fitment.

Base width (mm)	Tread depth (mm)
150	14.0
160	15.0
180	16.0

HW DR ✓ TLR SPECIALITY
60% 40%

KH211

A 5 rib pattern that gives high mileage particularly in long haul (inter-city), where traction is not a priority.

Base width (mm)	Tread depth (mm)
220	19.0
230	19.0
250	19.0

HW ✓ DR ✓ TLR ✓ SPECIALITY BUS/COACH
90% 10%

KM811

An open non-directional drive axle tread for increased mileage and wet grip in line haul. *(Inter-city applications).

Base width (mm)	Tread depth (mm)
220	19.5
230	19.5
250	19.5

HW ✓ DR ✓ TLR SPECIALITY
90% 10%

KL60

A cut and tear resistant compound for aggressive traction for off road. *(Unsealed road applications).

Base width (mm)	Tread depth (mm)
190	16.0
200	17.0
215	18.0

HW DR ✓ TLR SPECIALITY ✓
10% 90%

KM15

A traction design that gives good mileage/traction and puncture resistance. Ideal for industrial hoist application.

Base width (mm)	Tread depth (mm)
150	12.0
160	13.0
180	15.0

HW DR ✓ TLR ✓ SPECIALITY
60% 40%

KM74

Deep 3 rib pattern with wide grooves to (enhance stone ejection) and wide centre rib, for protection against stone penetration.

Base width (mm)	Tread depth (mm)
203	17.0
220	17.0
230	17.0

HW DR TLR ✓ SPECIALITY ✓
10% 90%

KM43

A deep all-weather drive pattern combining both high mileage and traction.

Base width (mm)	Tread depth (mm)
180	16.0
195	16.0
210	20.0
220	20.0
230	20.0
250	20.0

HW ✓ DR ✓ TLR SPECIALITY
90% 10%

KL64

A very deep and aggressive pattern for on/off *(mostly unsealed) road conditions where protection from stone damage and penetration such as logging and quarry application.

Base width (mm)	Tread depth (mm)
205	25.0
220	25.0
230	25.0

HW DR ✓ TLR SPECIALITY ✓
10% 90%

KH34

An all-position rib pattern designed for on and off road applications. *(Sealed and unsealed roads).

Base width (mm)	Tread depth (mm)
180	15.0
195	15.0
203	15.0
220	15.0
230	15.0

HW ✓ DR ✓ TLR ✓ SPECIALITY
80% 20%

KH95W

A wing design giving resistance to tread shoulder tearing where extremely tight turning is necessary. This 5 rib tread gives high mileage and stability.

Base width (mm)	Tread depth (mm)
295	14.5
330	14.5
370	14.5

HW ✓ DR ✓ TLR ✓ SPECIALITY TAG
90% 10%

KM44E

A deep aggressive drive axle tread with open shoulder to allow self cleaning. Not recommended for high speed applications.

Base width (mm)	Tread depth (mm)
200	21.0
220	21.0
230	21.0
240	21.0

HW ✓ DR ✓ TLR SPECIALITY ✓
70% 30%

Specialised Patterns Available on Request

CARTER'S

tyre service

GOODWAY
Supercool™
Engineered For Safety